



Optional Accessories

While the NINA Liquid Level Controls will work properly with any type of float switch (Tethered or Electro-mechanical) or a pressure switch that has a Normally Open dry contact. At System Dynamics Inc. we want your installations to be as trouble free as possible. So for us that means no more float switches of any kind whenever that is possible and we do not offer them with any of our controls. We offer the NINA Liquid Level Controls separately so you can purchase floats of any type from your favorite Distributor and use them with the NINA Liquid Level Controls. We offer three types of solid state sensor assemblies, PVC for non-pressurized environments, spark plug type, and stainless steel threaded plugs for pressurized environments and high temperatures. These solid rods will never foul or degrade due to water quality or any other reason. If you have a unique situation please call us today so we can help develop a sensor assembly for your environment.

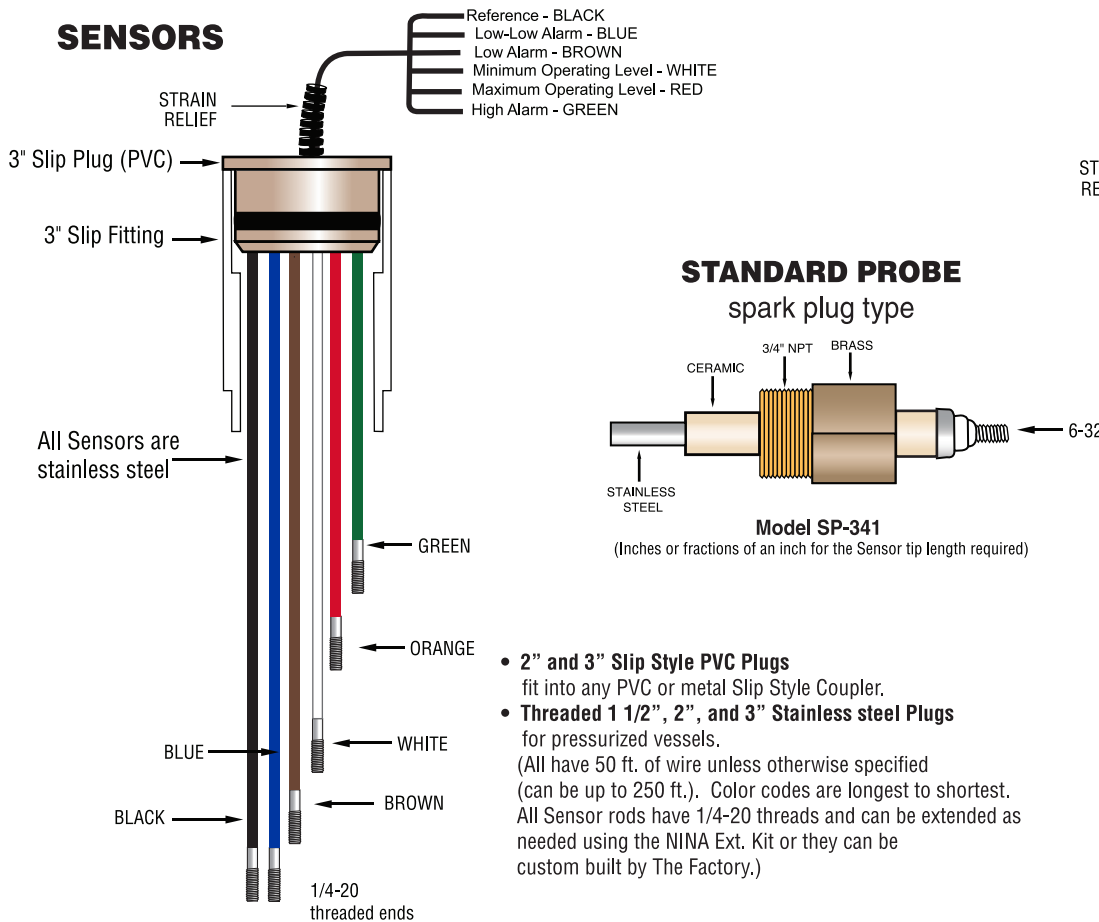

- **2" and 3" Slip Style PVC Plugs** fit into any PVC or metal Slip Style Coupler.
- **Threaded 1 1/2", 2", and 3" Stainless steel Plugs** for pressurized vessels. (All have 50 ft. of wire unless otherwise specified (can be up to 250 ft.). Color codes are longest to shortest. All Sensor rods have 1/4-20 threads and can be extended as needed using the NINA Ext. Kit or they can be custom built by The Factory.)

STAINLESS STEEL NPT

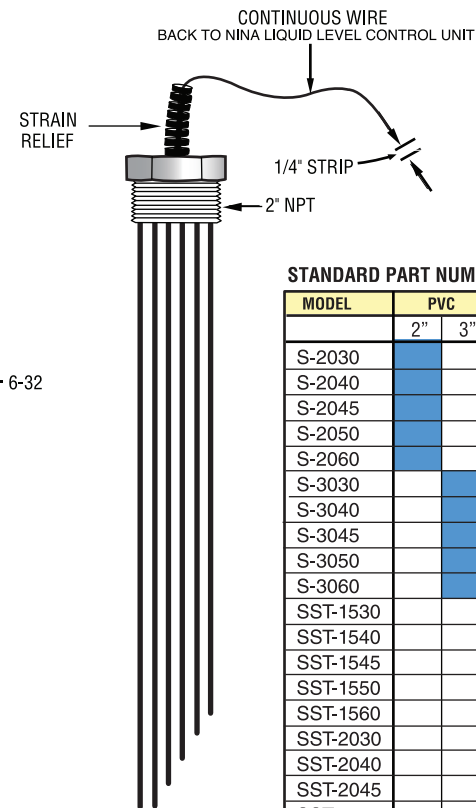

STANDARD PART NUMBERS FOR SENSORS

| MODEL | PVC | | STAINLESS STEEL | | | STANDARD LENGTH (in inches) | | | | | |
|----------|-----|----|-----------------|----|----|-----------------------------|------|--------|--------|--------|--------|
| | 2" | 3" | 1 1/2" | 2" | 3" | Black | Blue | Brown | White | Red | Green |
| S-2030 | | | | | | 17 | | | 17 | 15.5 | |
| S-2040 | | | | | | 17 | | | 17 | 15.5 | 10.375 |
| S-2045 | | | | | | 17 | | 17 | 16.375 | 14.875 | 10.375 |
| S-2050 | | | | | | 17 | | 17 | 16.375 | 14.875 | 10.375 |
| S-2060 | | | | | | 17 | 17 | 16.376 | 15.5 | 14 | 10.375 |
| S-3030 | | | | | | 17 | | | 17 | 15.5 | |
| S-3040 | | | | | | 17 | | | 17 | 15.5 | 10.375 |
| S-3045 | | | | | | 17 | | 17 | 16.375 | 14.875 | |
| S-3050 | | | | | | 17 | | 17 | 16.375 | 14.875 | 10.375 |
| S-3060 | | | | | | 17 | 17 | 16.376 | 15.5 | 14 | 10.375 |
| SST-1530 | | | | | | 17 | | | 17 | 15.5 | |
| SST-1540 | | | | | | 17 | | | 17 | 15.5 | 10.375 |
| SST-1545 | | | | | | 17 | | 17 | 16.375 | 14.875 | |
| SST-1550 | | | | | | 17 | | 17 | 16.375 | 14.875 | 10.375 |
| SST-1560 | | | | | | 17 | 17 | 16.376 | 15.5 | 14 | 10.375 |
| SST-2030 | | | | | | 17 | | | 17 | 15.5 | |
| SST-2040 | | | | | | 17 | | | 17 | 15.5 | 10.375 |
| SST-2045 | | | | | | 17 | | 17 | 16.375 | 14.875 | |
| SST-2050 | | | | | | 17 | | 17 | 16.375 | 14.875 | 10.375 |
| SST-2060 | | | | | | 17 | 17 | 16.376 | 15.5 | 14 | 10.375 |
| SST-3030 | | | | | | 17 | | | 17 | 15.5 | |
| SST-3040 | | | | | | 17 | | | 17 | 15.5 | 10.375 |
| SST-3045 | | | | | | 17 | | 17 | 16.375 | 14.875 | |
| SST-3050 | | | | | | 17 | | 17 | 16.375 | 14.875 | 10.375 |
| SST-3060 | | | | | | 17 | 17 | 16.376 | 15.5 | 14 | 10.375 |