



FLOAT SENSORS APPROVAL SHEET

| |
|--------------|
| CUSTOMER |
| PO# |
| SO# |
| SHIP DATE |
| QUANTITY |
| FITTING SIZE |

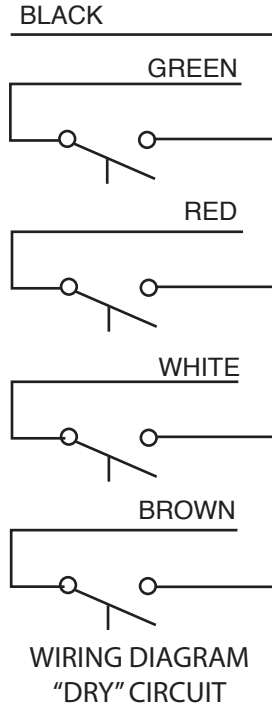

- NOTES:
- All materials are stainless steel 316SS.
 - Operating Pressure: 120 PSIG Max.
 - Temperature Range: -40 F° to +200° F Max.
 - Electrical Specifications:
 - Switching Voltage: 120 V AC/DC Max.
 - Switching Current: 0.35 AC/DC Amp. Max.
 - Contact Rating: 40 VA Max.
 - Minimum Media SP. GR. : 1.00 SG.
 - Float Submergence: .90" +4P REF.
 - Agency Approval: UL File No.
 - Float over travel between 1/8" - 3/8".

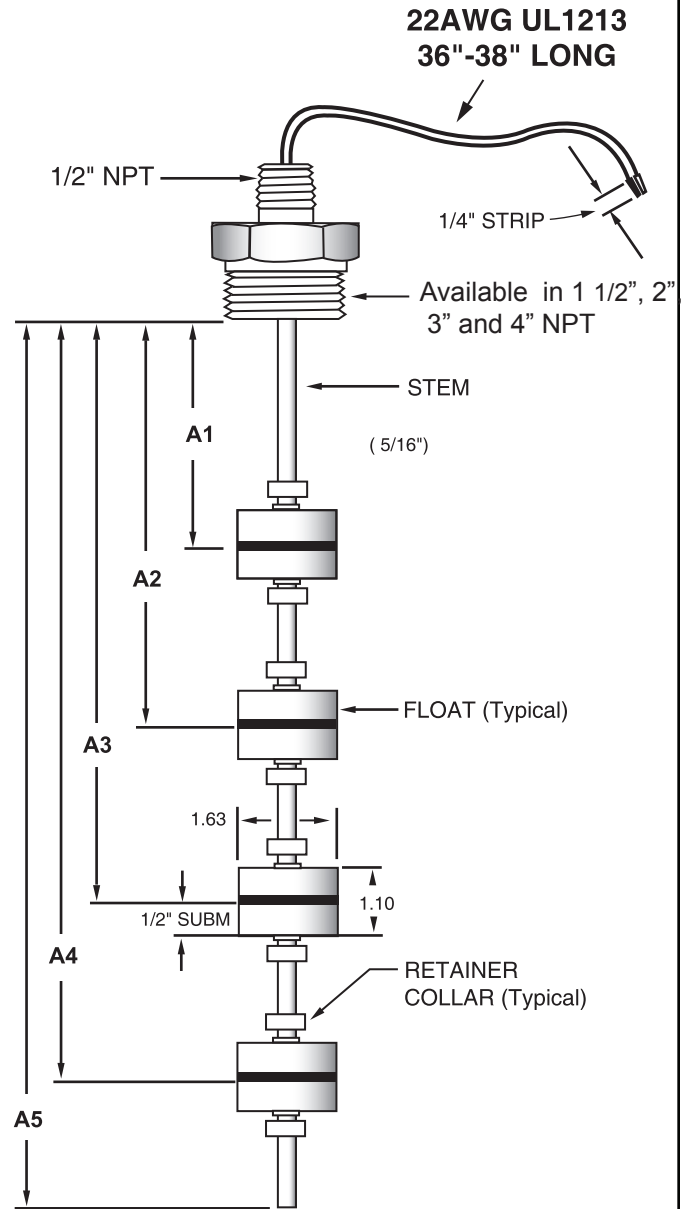

Dimensions should be calculated from the top of the tank or riser down to the required alarm level(s) in inches. Be sure to take into account any riser pipes or manway risers.

System Dynamics, Inc.
 P.O. Box 12544
 Scottsdale, Arizona 85260
 Toll Free: 888-905-1892
 info@waterlevelcontrols.com
 www.waterlevelcontrols.com

| FLOAT | LENGTHS |
|---------|---------|
| Green | A1 |
| Red | A2 |
| White | A3 |
| Brown | A4 |
| Overall | A5 |

Name:

Company:

Signature:

Date: