



# FK5-STK SERIES 5 SWITCH FLOATKILLER STICK SUBMITTAL


## SENSOR APPROVAL SHEET

CUSTOMER
PO#
SO#
SHIP DATE
QUANTITY
WIRE LENGTH (ft)

- Choose cup size**
- 24V
    - 2" cup **24-2FK5R-STK**
    - 3" cup **24-3FK5R-STK**

**OVERVIEW**

1" PVC Pipe with Stainless Steel Rings at various intervals. When liquid contacts bottom of the ring, the function is active. When liquid falls below the bottom of the ring, the function is inactive.

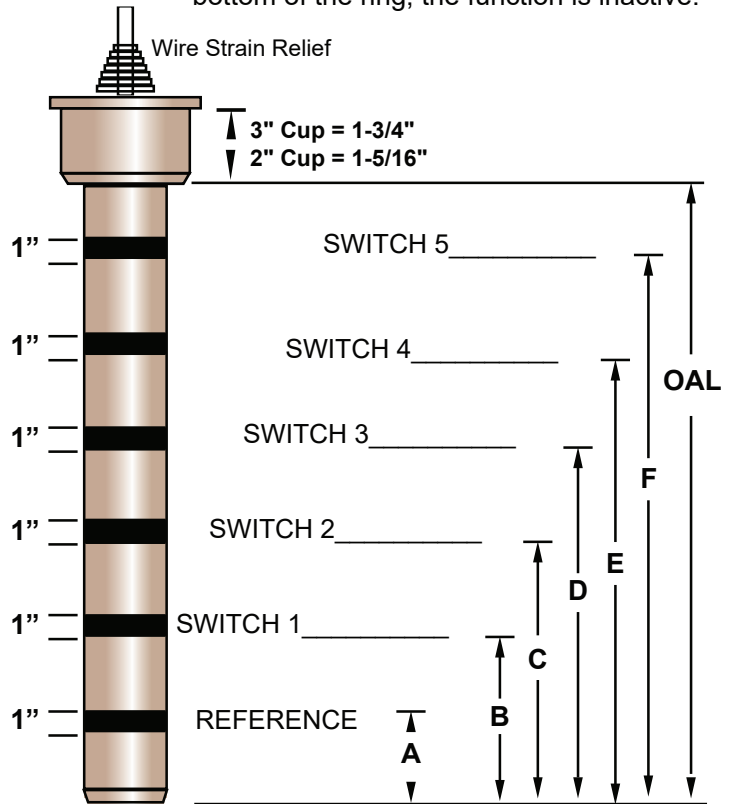

**NOTE:**  
Standard wire length is 20ft.  
Minimum wire length is 5ft.

- Components**
- PVC Slip Fitting cup.
  - 1" Schedule 40 PVC Pipe with 3/4" passivated Stainless Steel rings.
  - 18AWG Sensor Wire.

System Dynamics, Inc.  
P.O. Box 12544 Scottsdale,  
Arizona 85260

Toll Free: 866-243-2505  
sales@waterlevelcontrols.com  
www.waterlevelcontrols.com

**Determining Ring Placement**

Measurements B-F are from the bottom of the ring to the bottom of the sensor stick. 3-1/2" minimum between rings.  
The Over All Length is measured from the bottom of the sensor cup to the bottom of the sensor stick.

OAL		Custom Length F + 9"
SWITCH 5	F	3.5"
SWITCH 4	E	
SWITCH 3	D	
SWITCH 2	C	
SWITCH 1	B	
REFERENCE	A	

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_