



# FK5R-STK SERIES 5 SWITCH FLOATKILLER STICK SUBMITTAL

## SENSOR APPROVAL SHEET


|                  |
|------------------|
| CUSTOMER         |
| PO#              |
| SO#              |
| SHIP DATE        |
| QUANTITY         |
| WIRE LENGTH (ft) |
|                  |

**Factory provided Power Supply**  
(for Re \_\_\_\_\_ or new panel)

2" D-2FK5-STK  
3" Wid A8-3FK5-STK

### OVERVIEW

1" PVC Pipe with Stainless Steel Rings at various intervals. When liquid contacts bottom of the ring, the function is active. When liquid falls below the bottom of the ring, the function is inactive.

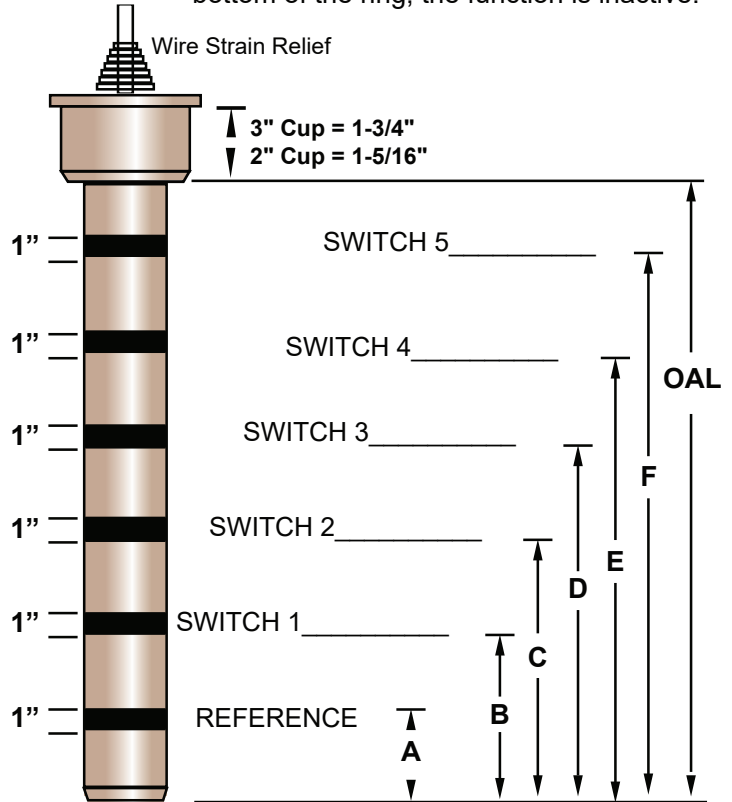

**NOTE:**  
Standard wire length is 20ft.  
Minimum wire length is 5ft.

Components

- PVC Slip Fitting cup.
- 1" Schedule 40 PVC Pipe with 3/4" passivated Stainless Steel rings.
- 18AWG Sensor Wire.

System Dynamics, Inc.  
P.O. Box 12544 Scottsdale,  
Arizona 85260

Toll Free: 866-243-2505  
sales@waterlevelcontrols.com  
www.waterlevelcontrols.com

Determining Ring Placement

Measurements B-F are from the bottom of the ring to the bottom of the sensor stick. 3-1/2" minimum between rings.  
The Over All Length is measured from the bottom of the sensor cup to the bottom of the sensor stick.

| OAL       |   | Custom Length |
|-----------|---|---------------|
| SWITCH 5  | F | F + 9"        |
| SWITCH 4  | E |               |
| SWITCH 3  | D |               |
| SWITCH 2  | C |               |
| SWITCH 1  | B |               |
| REFERENCE | A | 3.5"          |

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_